
KNOX RESIDENTIAL BOX® MOUNTING INSTRUCTIONS



5″ W 2-3/4' ► 5/8″ -- 1-1/8" - 1-1/8" Key hook 1-3/32 Tamper Alert wire \oplus exit opening \oplus 29/32 Tamper Alert 4″ H opening 1-13/16" Tamper Alert mounting holes \oplus (Qty 2) Mounting holes (Qty 4)

Front View of Back Plate

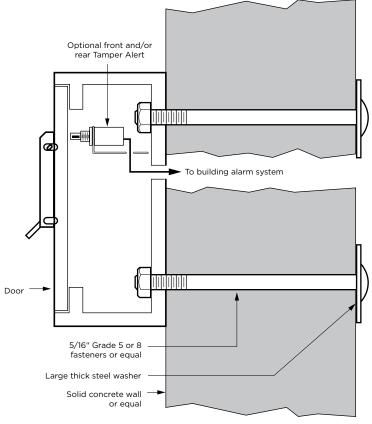

Surface Mounted Models

GENERAL MOUNTING INSTRUCTIONS

1. CAUTION! Be extremely careful when handling the Knox Residential Box prior to installation. When not mounted, the door will be OPEN. Always hold box and door securely to prevent door closing on fingers and causing injury.

Tamper Alert: If your Knox Residential Box has the Tamper Alert feature, remove the Tamper Alert assembly and set aside for installation after the box is mounted.

- 2. Always mount your Knox Residential Box to a secure, solid wall, beam or post in an area sheltered from excessive moisture. For fire department use, consult your fire department for other mounting requirements such as height and placement on the building. A six (6) foot height level is recommended to resist vandalism.
- **3.** Position the Knox Residential Box with green mounting markers pointed up with the hinge on the right-hand side to allow for proper drainage. Remove the green markers after installation.
- 4. Use a small level to plumb the box square.
- 5. Install the box using at least four (4) Grade 5 or Grade 8 fasteners (carriage bolts, etc.) of 3/8" diameter. Units must be mounted to solid beams or steel supports, or they may be welded into place. Do not mount face down from ceiling or overhang. This may cause contents to jam the lock.
- 6. For proper weatherproofing, caulk the back of box across top and down each side. Leave the bottom open for drainage.

MOUNTING INSTRUCTIONS FOR SURFACE MOUNT

Surface models are designed for mounting on a flat wall. Do not mount face down from a ceiling or overhang area. Install the Tamper Alert assembly after the box is mounted and check to see that the "box to wall" Tamper Alert plunger is properly depressed. A qualified alarm installer should perform alarm wiring, testing and adjusting.

NOTE:

Suggested minimum mounting height: 6' above ground

ATTENTION:

Installation of this product should be performed only by individuals skilled in the use of the tools and equipment necessary for installation. If you have any doubt concerning your competence or expertise, consult a qualified expert to perform the installation.

METRO FIRE+ SECURITY



Knox Company. All rights reserved

MOUNTING INSTRUCTIONS





WARNING:

beginning installation. Failure to properly instructions will compromise the security Read all instructions carefully before mount the device per the installation of the device.

Knox Residential Box is inherently a very properly to ensure maximum security. strong device that must be mounted

the inside key hook. THE UNIT WILL NOT A limit of two (2) keys may be hung on HOLD MORE THAN TWO (2) KEYS.









Each key vault is coated with the Knox-Box is a very strong device that under four (4) UL listings. Knox Residential dust cover to protect the lock. The Knox and includes a 1/8" thick stainless steel security and to resist physical vandalism Residential Box is fully tested and listed Coat[®] proprietary finishing process* mounted properly to ensure maximum t must be

Side View

1-7/8"

Top Edge of

Typical 1-3/4"

Residential Front Door

Door Hanger Models

Door Tamper Alert plunger (green wire)

Rear Tamper Aler

Tamper Alert wire exit opening (A)

METRO FIRE+ SECURITY

KN0X-COAT

process that protects Knox products up to four times better Knox-Coat is a proprietary finishing

than standard powder coat.

opening (B)

1-5/16'

BEFORE MOUNTING: READ INSTRUCTIONS CAREFULLY

to secure residential entrance keys

The Knox Residential Box was developed

3/16" Door Mount Holes

1-7/8

Front View Door Hanger

1-7/8" ŀ ŧ ⊕

3/16" Door Mount Holes

Top View Door Hanger

3/16" Door Mount Holes

Back View Door Hanger

ŀ -1-7/8"-

3/4" Ð ŧ

Tamper Alert mounting screws

Tamper Alert Assembly

Rear Tamper Alert plunger (red wire)

Back plate

 \bigcirc

Œ

Ð

Ð

3/8

Ð


Door

Hange



MOUNTING INSTRUCTIONS

63 S HAMILTON PL, GILBERT, AZ 85233 | P: (480) 464-0509 | KNOXBOX@METROFIREANDSECURITY.COM | METROFIREANDSECURITY.COM



UL 437

UL 1037

UL 1610

key to lock the box.

the door.

All Knox Residential Boxes are fully tested and listed by Underwriters Laboratories as anti-theft devices.

Alarm Tamper Alert switches are UL listed as Central Station Alarm Units. UL Electrical Range: Max Voltage of 24 VDC at 50 mA.

BOX LOCKUP:

When mounting of the Knox Residential Box is complete, contact your local fire department to inform them the box is ready for lock up. They have the only

For private, industrial or commercial use: Keys will be sent separately to address requested.

Electrical Equipment

Standard for Safety for Key Locks

Antitheft Alarms and Devices

Central Station Alarm Units

with small screws or nails to prevent removal.

2. Check to see that the hanger does not interfere with the

model, remove the door bracket and mount using the

door weather seal. 3. For semi-permanent installation, fasten hanger to door

of the entry door. Position the unit on the hinged side of

4. To convert the Door Hanger model to a Surface Mount Mounting Instructions for Surface Mount models on the previous page.

MOUNTING INSTRUCTIONS FOR DOOR HANGER 1. Place the Knox Residential Box with hanger over the top