

KnoxBox 3200, the number one high-security key lock box trusted by emergency responders and property owners, is now available with the electronic Knox eLock Core®. Store up to 10 keys to gain rapid access to commercial properties. Box openings are recorded and tracked in the cloud-based KnoxConnect® Management System.



Available in 3 colors:



FEATURES

- ✓ Stores maximum 10 keys. Access cards and small entry items may also fit in interior compartment but will reduce max key quantity.
- ✓ Knox eLock Core, powered by Knox eKey®
- ✓ Dust cover reflective label for Knox eLock System® identification
- ✓ Enables tracking of box openings via cloud-based KnoxConnect®
- ✓ Built Knox-Rugged and secure: UL 1037, UL 1610, UL 1332
- ✓ Finished with Knox-Coat® to protect four times better than standard powder coat
- ✓ Weather-resistant door gasket
- ✓ Knox RainGuard® for weather protection
- ✓ Hinged door

BENEFITS

- ✓ No wiring or battery needed for power
- ✓ Captures box openings by date and time
- ✓ Allows rapid property access
- ✓ Reduces forced entry property damage
- ✓ Prevents forced entry into buildings
- ✓ Minimizes first responder injury
- ✓ Compliant to National Fire Code (NFPA, IFC, IBC)

OPTIONS

- ✓ Knox Tamper Alert® connects to building's alarm system for extra security
- ✓ Mount types: Recessed and Surface
- ✓ 3 color options: Black, Aluminum, Dark Bronze

ACCESSORIES

- ✓ Multi-Purpose Switch for use on electrical doors, gates and other electrical equipment
- ✓ Recess Mounting Kit for new concrete or masonry construction
- ✓ Public Safety Labels
- ✓ Tag-Out Tamper Seals, Key Tags, and Key Rings

ORDERING SPECIFICATIONS

To insure procurement and delivery of the Electronic KnoxBox 3200, it is suggested that following specification paragraph is used:

KnoxBox surface/recessed mount with hinged door, with/without UL Listed Knox Tamper Alert. 1/4" plate steel housing, 1/2" thick steel door with interior gasket seal and stainless steel door hinge. Box is UL Listed. Lock has 1/8" thick stainless steel dust cover with tamper seal mounting capability, a rainguard to protect against certain weather conditions and a reflective Knox label indicating the Knox eLock System.

Exterior Dimensions: Surface Mount Body - 4" H x 5" W x 3-7/8" D
 Recessed Mount Flange - 7" H x 7" W

Electronic Lock: Powered by Knox eKey. Communicates using industry standard encryption.

Finish: Knox-Coat proprietary finishing process

Color: Black, Dark Bronze or Aluminum

P/N: KnoxBox KLS-3200 (mfr's cat. ID)

Mfr's Name: KNOX COMPANY





WEIGHT:

Surface Mount - 8 lb
 Recessed Mount - 9 lb

DIMENSIONS:



Surface Mount Body - 4" H x 5" W x 3-7/8" D
 Recessed Mount Flange - 7" H x 7" W

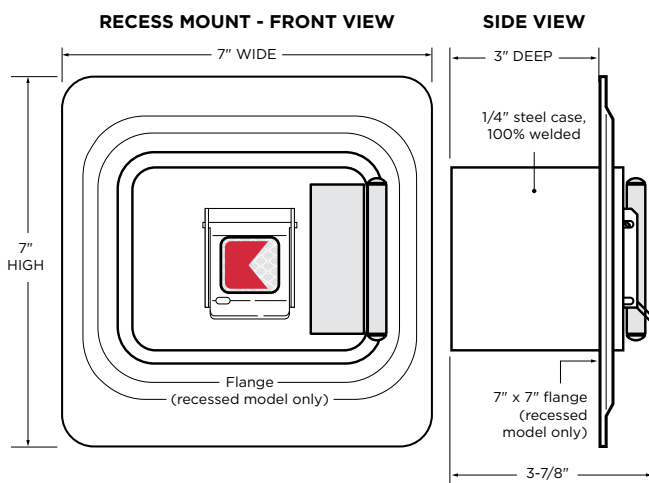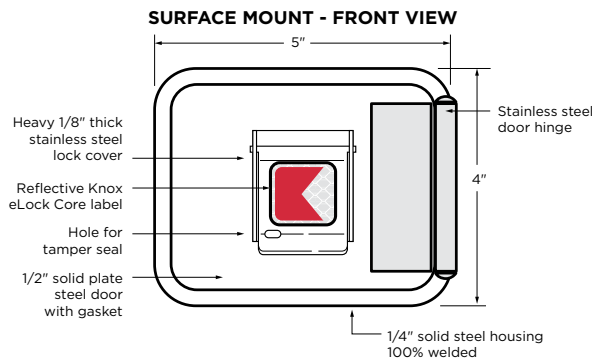

GENERAL MOUNTING INSTRUCTIONS

Suggested minimum mounting height, 6 feet above ground.

ATTENTION: KnoxBox is a very strong device that **MUST** be mounted properly to ensure maximum security and resist physical attack.

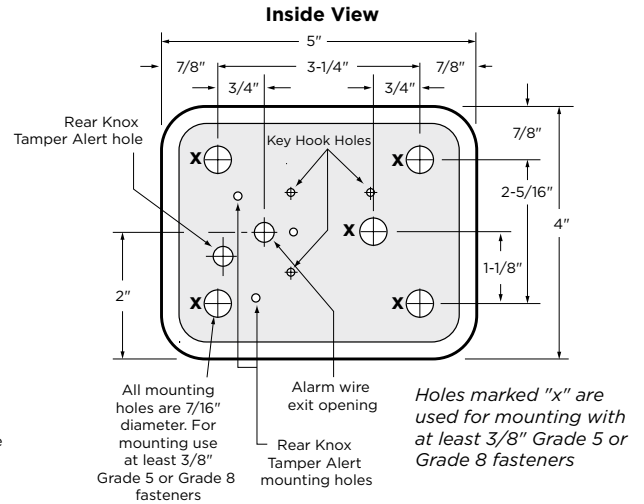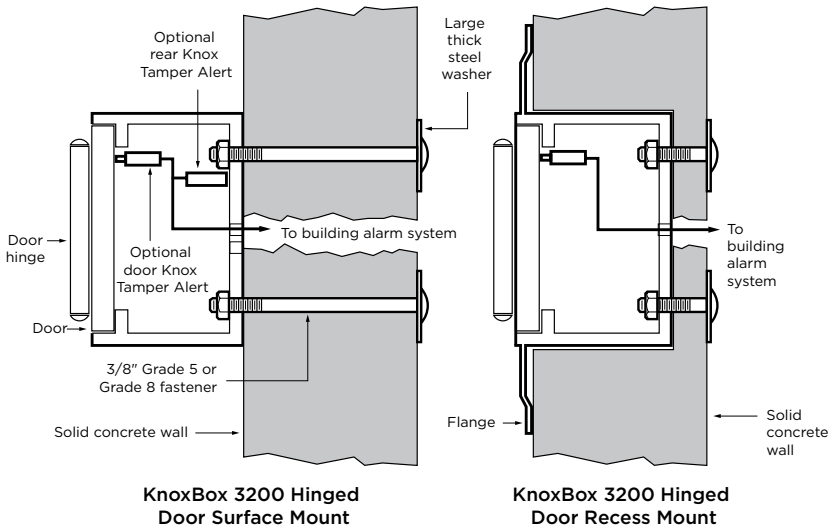


RECESS MOUNTING KIT AND INSTALLATION INSTRUCTIONS

The Recess Mounting Kit (RMK) includes shell housing and mounting hardware, which may only be used for recessed models to cast-in-place within new concrete or masonry construction. The KnoxBox is mounted into the shell housing after construction is completed.

RECESS MOUNTING KIT DIMENSIONS

Rough-in Dimensions:
6-1/2" H x 6-1/2" W x 5" D

Recessed Mounting Using Recess Mounting Kit (RMK)

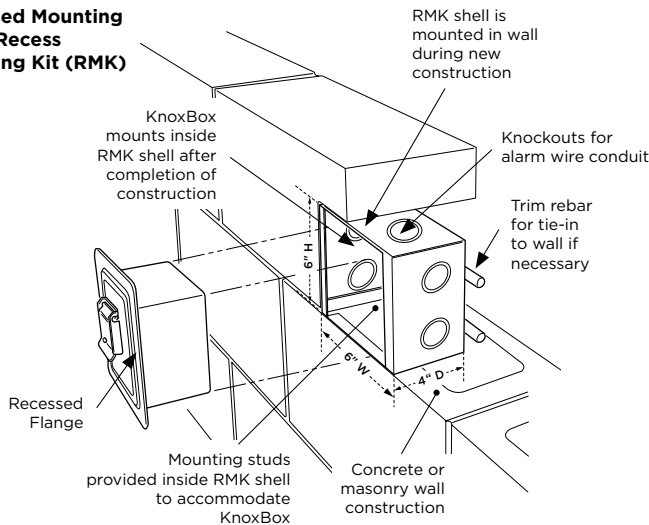

IMPORTANT:

Care should be taken to ensure the front of the Recess Mounting Kit (RMK) shell housing, including the cover plate and screw heads, is flush with the wall. The RMK must be plumbed to ensure vertical alignment of the box.