

# KNOXVAULT® 4400

## SINGLE LOCK MODEL

The KnoxVault 4400 is the largest capacity exterior rapid access key lock box available. It secures a combination of these items: 50 keys, access cards, emergency plans, and a FDC Wrench. Trusted by first responders to gain access to businesses, universities, multi-housing complexes, and commercial/industrial buildings.



### FEATURES

- ✓ A high-capacity volume that stores a combination of multiple keys, access cards, entry credentials, and plans
- ✓ UL Listed: UL 1037, UL 437, UL 1610, and UL 13327
- ✓ Finished with Knox-Coat® to protect four times better than standard powder coat
- ✓ Durable Knox-Coat® finish performs four times better than standard powder coating

### BENEFITS

- ✓ Provides rapid access into buildings and holds a larger volume of contents
- ✓ Reduces forced entries and property damage
- ✓ Minimizes potential for first responder injuries
- ✓ Compliant to National Fire Codes: IBC, IFC, and NFPA

### OPTIONS

- ✓ For additional security, the Knox Tamper Alert can be connected to the building's alarm system
- ✓ Recess and surface mounting models available
- ✓ Available in black, aluminum, and dark bronze
- ✓ Dual lock configuration

### ACCESSORIES

- ✓ Multi-Purpose Switch for use on electrical doors, gates, and other electrical equipment
- ✓ Recess Mounting Kit for new concrete or masonry construction

### ORDERING SPECIFICATIONS

To ensure procurement and delivery of the KnoxVault 4400, it's recommended that the following specification verbiage be used:

KnoxVault surface/recessed mount with/without UL Listed Knox Tamper Alert, 1/4" plate steel housing, 5/8" thick steel door with interior gasket seal and stainless steel door hinge. Vault & lock UL Listed. Lock has 1/8" thick stainless steel dust cover with tamper seal mounting capability. Vault has anti-theft drill resistant hard-plate lock protector.

**Exterior Dimensions:** Surface Mount: 7"H x 7"W x 5"D  
 Recessed Mount Flange: 9 1/2"H x 9 1/2"W

**Lock:** UL Listed. Double-action rotating tumblers and hardened steel pins accessed by a biased cut key

**Finish:** Knox-Coat® proprietary finishing process

**Color:** Black, Dark Bronze, or Aluminum

**P/N:** KnoxVault 4400 (mfr's cat. ID)

**Mfr's Name:** The Knox Company




### WEIGHT:

Surface Mount - 28 lbs  
 Recessed Mount - 29 lbs

### DIMENSIONS:


Surface Mount Body - 7"H x 7"W x 5"D  
 Recessed Mount Flange - 9 1/2"H x 9 1/2"W

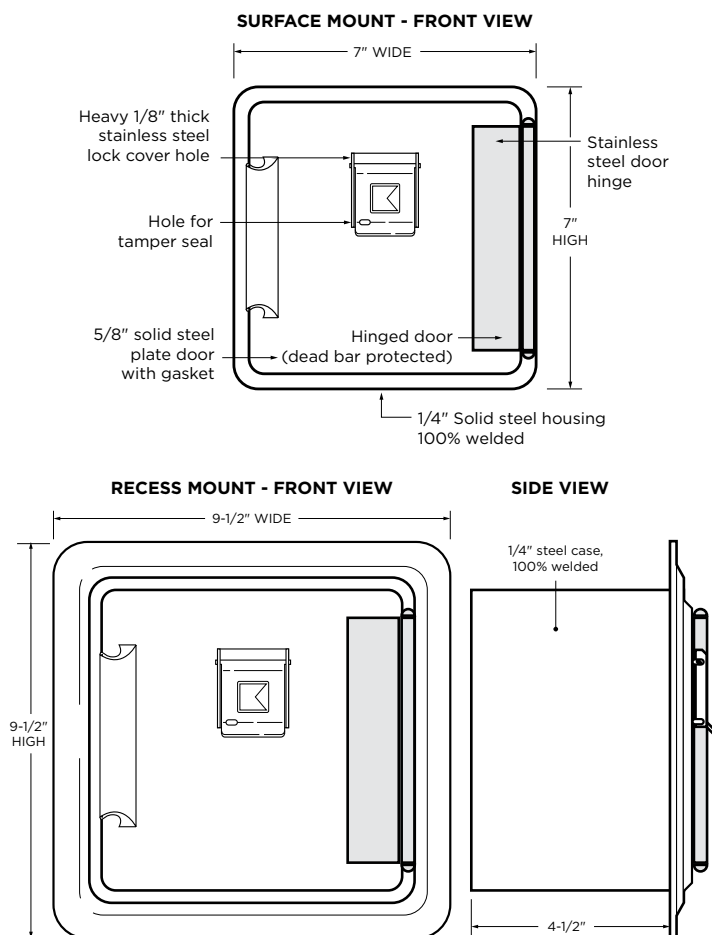

### GENERAL MOUNTING INSTRUCTIONS


**Suggested minimum mounting height, 6 feet above ground.**

**ATTENTION:** KnoxVault is a very strong device that **MUST** be mounted properly to ensure maximum security and resist physical attack.

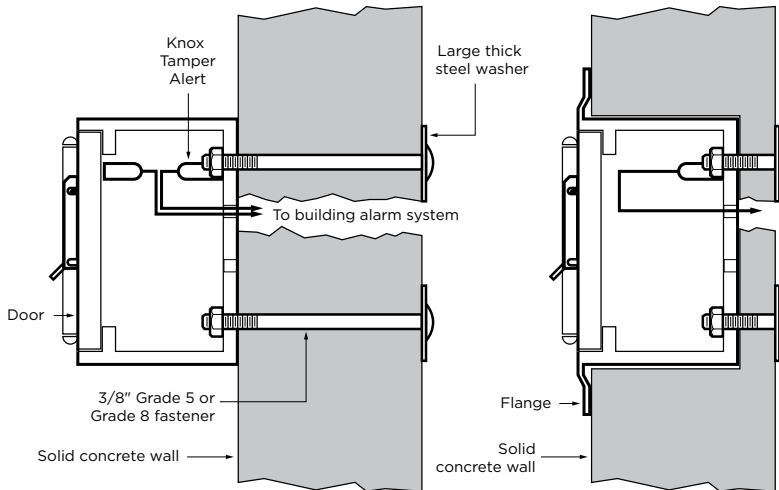

KnoxVault 4400 Surface Mount

KnoxVault 4400 Recessed Mount

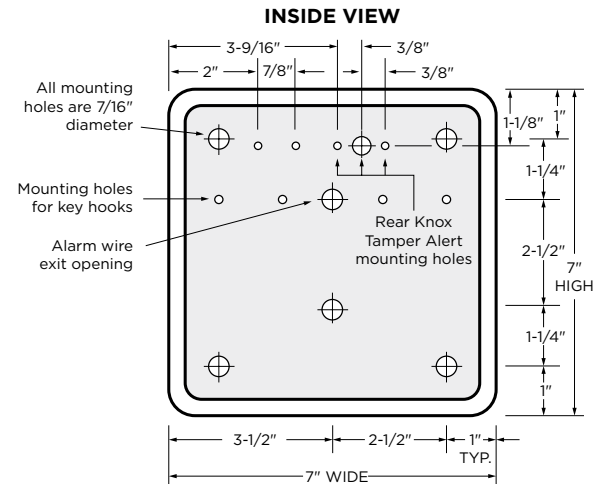


### RECESS MOUNTING KIT AND INSTALLATION INSTRUCTIONS

The Recess Mounting Kit (RMK) includes shell housing and mounting hardware, which may only be used for recessed models to cast-in-place within new concrete or masonry construction. The KnoxVault is mounted into the shell housing after construction is completed.

#### RECESS MOUNTING KIT DIMENSIONS

Rough-in Dimensions:  
8-1/2"H x 8-1/2"W x 7"D

#### Recessed Mounting Using Recess Mounting Kit (RMK)

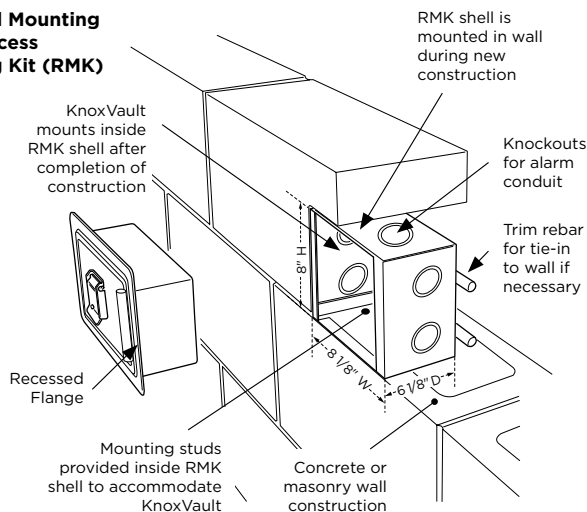

#### IMPORTANT:

Care should be taken to ensure the front of the Recess Mounting Kit (RMK) shell housing, including the cover plate and screw heads, is flush with the wall. The RMK must be plumbed to ensure vertical alignment of the vault.